#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau



### 

#### (43) International Publication Date 19 May 2005 (19.05.2005)

#### PCT

## (10) International Publication Number WO 2005/045881 A1

(51) International Patent Classification<sup>7</sup>: C09K 11/59 H01J 61/44,

(21) International Application Number:

PCT/IB2004/052256

(22) International Filing Date:

2 November 2004 (02.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 03104155.1

11 November 2003 (11.11.2003) EP

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): HILDENBRAND, Volker, D. [DE/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Bindhoven (NL). SENSEN, Maurice, J., S., E. [NL/NL];

c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). JUESTEL, Thomas [DE/DE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SCHMIDT, Peter, J. [DE/DE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (74) Agents: ROLFES, Johannes, G., A. et al.; Prof. Holst-laan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: LOW-PRESSURE VAPOR DISCHARGE LAMP WITH A MERCURY-FREE GAS FILLING

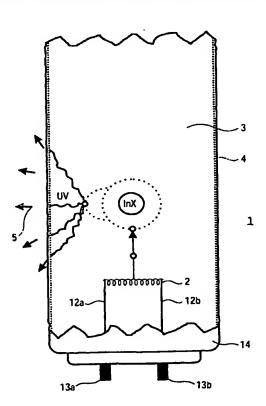

(57) Abstract: A low-pressure vapor discharge lamp has a radiation-transmitting discharge vessel (1) enclosing, in a gastight manner, a discharge space (3) provided with a gas filling. The gas filling is substantially free of mercury and comprises an indium compound and a buffer gas. The discharge vessel (1) comprises discharge means (2) for maintaining a gas discharge in the discharge space (3). The discharge vessel (1) is provided with a luminescent layer (4). The luminescent layer (4) comprises a luminescent material based on a nitridosilicate or on an oxonitridosilicate. Preferably, the luminescent material comprises rare-earth emitters. Preferably, the luminescent material comprises europium, cerium, or ytterbium emitters.